

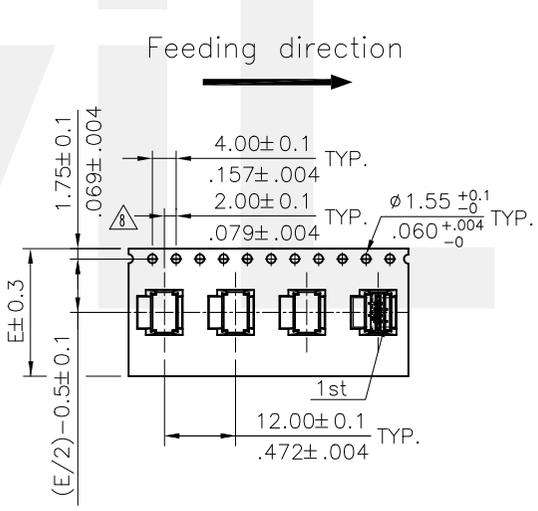


- NOTE :
- * Reel Material : Corrugated Paper
 - * Carrier Material : Clear Conductive Polystyrene Alloy
 - * Cover Tape Material : Polyester
 - * Cover Tape Peel Strength : 0.1N – 1.3N
 - * Carrier camber is within 1mm in 100mm
 - * All dimensions meet EIA-481-2 & EIA-481-3 requirements.
 - * Quantity : 1200 PCS/Reel

Circuits	Dimension					Packing (Reel/Carton)
	E	F	W1	W2	W3	
4~5	16.0(.630)	-	16.5(.650)	22.5(.886)	16.5(.650)	11
6~15	24.0(.945)	-	24.5(.965)	30.5(1.201)	24.5(.965)	9
16~17	32.0(1.260)	28.40(1.118)	32.5(1.280)	38.5(1.516)	32.5(1.280)	7
18~30	44.0(1.732)	40.40(1.591)	44.5(1.752)	50.5(1.988)	44.5(1.752)	5
31~32	56.0(2.205)	52.40(2.063)	56.5(2.224)	62.5(2.460)	56.5(2.224)	4

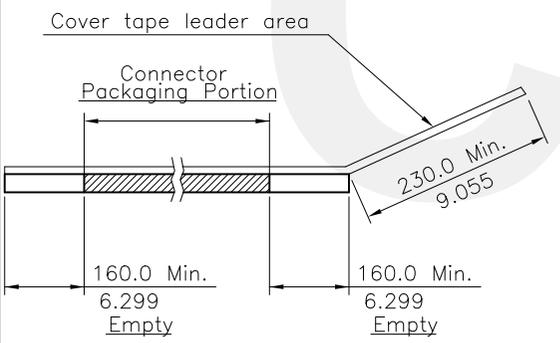

△ WIDTH : 16, 24mm Carrier

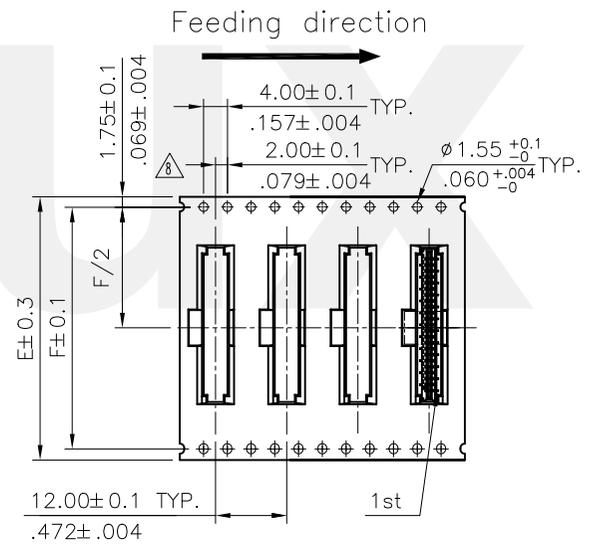

△ WIDTH : 32, 44, 56mm Carrier

CIVILUX CORP
 2016.06.16
 ISSUED

RoHS Compliant

△9	Sandy	6/14-16'	ECRB116027/ECNT116108		DATE	UNIT: mm / inch	TITLE: 1.00mm ST. SMT TYPE LIF FFC/FPC CONN.	 瀚荃股份有限公司 CviLux Corporation	
△8	Sun	1/18-16'	ECRB115071/ECNT116004	DRAWN BY: Sandy	6/14-16'	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:		
△7	Karen	6/04-12'	ECN12095-0/ECR12033-1	ENGINEER: Sun	6/15-16'	.X ± .X' ± 1'	CUSTOMER:		
△6	Sandy	9/22-07'	ECN07381/ECR07065-1	CHECKED BY: Eisley	6/16-16'	.XX ± .X ±	DRAWING NO. CF0811SJ		
SYM	NAME	DATE	REVISIONS	APPROVED BY: Eisley	6/16-16'	.XXX ± .XX ±	PART NO. CF08**1M1RO CF08**1M1RN		
								SCALE	SHEET 2 OF 2