


ENGINEERING	CRIMP SPECIFICATION	SPEC. No.:SCCI010B
DEPT.	For CI35T021BE0/CI35T021PE0 TERMINAL	PAGE: 1 / 1

1. Crimp height and width of crimped core should be set as required. (crimped height and width of wire barrel)
2. Crimp width of crimped sheath shall be adjusted according to the final out side diameter and the kind of electric wire, to the extent that sheathed wire won't be easily taken off from contact nor too much crimped. (crimped width of insulation barrel)

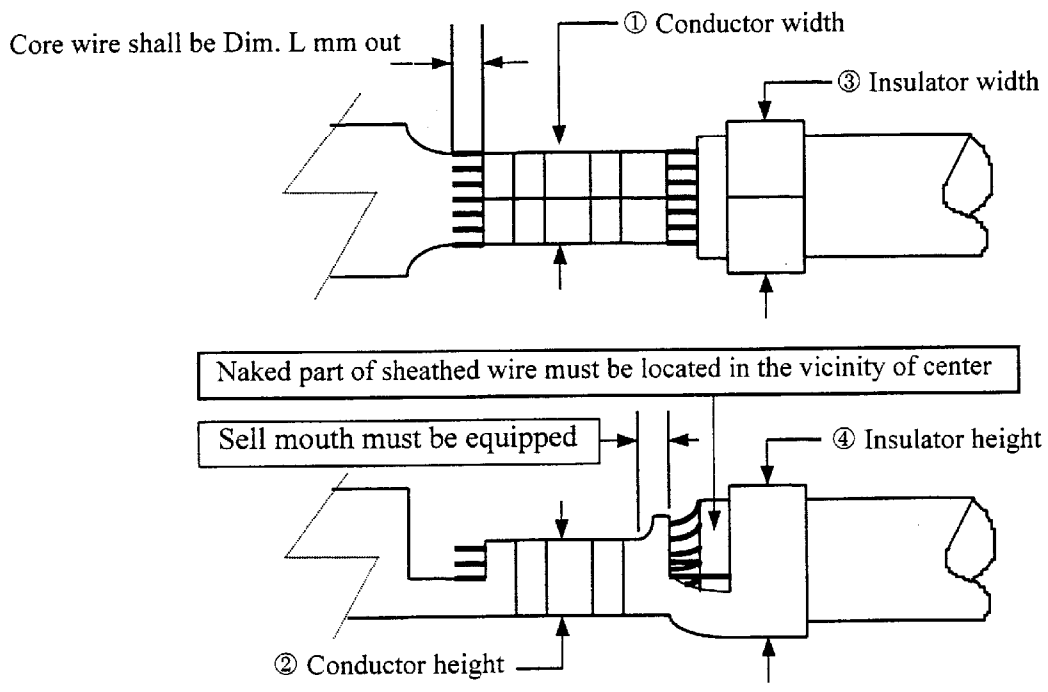

Subject : UL 1007 or equivalent type electric wire

AWG #	Conductor mm ²	Insulator Diameter	Applicator	Core crimp length	Dim. L
#28 - #22	0.089 - 0.342	1.20 - 1.60mm	A01CI35T020	3.5 - 4.0 mm	0.5 -1.0 mm

Wire Gage (AWG #)	Conductor Crimp Area		Insulator Crimp Area		Terminal Tensile Strength
	Width (1)	Height (2)	Width (3)	Height (4)	
#22	1.50 - 1.60	0.75 - 0.85	1.80 - 1.90	---	5.0 Kgf
#24		0.70 - 0.80		---	3.0 Kgf
#26		0.65 - 0.75		---	2.0 Kgf
#28		0.63 - 0.73		---	1.3 Kgf

DATE	REVISIONS	SPEC BY:	<i>Sandy 3/2-99</i>
		CHKD BY:	<i>David 3/2-99</i>
		APPR BY:	<i>Ang 3/2-99</i>

